



Diagram illustrating the correct placement of the laptop on the charging pad. The left side shows the laptop placed correctly with the charging cable connected to the bottom. The right side shows the laptop placed incorrectly with the charging cable connected to the top. A dashed circle with a lightning bolt symbol indicates the correct placement area.

1. 支援MagSafe無線充電，循環使用
2. 全球定位防丟失
3. 蘋果MFi認證產品
4. 蘋果Find My平台
5. 無需下載第三方APP
6. 超薄卡片設計
7. IP65防水等級

註：產品僅適用於蘋果設備 iOS 系統



1. 新品首次開機，請長按開關5秒鐘後會聽到警響。
2. 打開「尋找」APP。
3. 將設備靠近您的iPhone，點擊「物品」，選擇「+」符號後點擊「加入其他物品」。
4. 偵測到裝置後，點擊「連接」。
5. 命名您的裝備，並選擇一個圖示。
6. 同意將裝備註冊到您的Apple ID，點擊「完成」後，綁定成功。

1. 新品首次開機，請長按開關5秒鐘後會聽到警響。
2. 打開「尋找」APP。
3. 將設備靠近您的iPhone，點擊「物品」，選擇「+」符號後點擊「加入其他物品」。
4. 偵測到裝置後，點擊「連接」。
5. 命名您的裝備，並選擇一個圖示。
6. 同意將裝備註冊到您的Apple ID，點擊「完成」後，綁定成功。

1. 打開「尋找」APP
2. 點選「物品」後，選取設備名稱。
3. 下滑選單，尋找到「遺失模式」並點選啟用。
4. 依照螢幕指示操作，點選「繼續」輸入聯繫電話和信箱，核對訊息後，點選「啟用」完成設置。

1. 確認尋找器在通電狀態下。
2. 打開「尋找」APP；點選「裝置」選取設備名稱；
3. 在列表下點選「移除裝置」註：刪除設備後，設備會發出提示音，LED燈號閃爍6次，此時處於配對模式。10分鐘之內沒有重新配對，設備就會結束配對。要重新配對，需要重新按鍵一次，聽到提示音、LED閃爍1次，就可重新配對。

1. 開機：長按5秒鐘後會聽到開機提示聲響。
2. 關機：於開機狀態下，2秒鐘內按壓按鍵5次，會聽到關機提示聲響。
3. 狀態確認：雙擊按鍵，發出提示聲則為正常待機模式。

- ；若無聲音可能處於關機狀態或低電力狀態（請參考電池說明）。
- 恢復出廠設置：**
1. 於「尋找」APP內移除綁定的裝置。
 2. 於開機狀態下，雙擊按鍵，會聽到提示聲音，立即長按10秒後會聽到提示聲音。
 3. 鬆開按鍵，恢復出廠設置完成。

1. 於「尋找」APP內移除綁定的裝置。
2. 於開機狀態下，雙擊按鍵，會聽到提示聲響，立即長按10秒後會聽到提示聲響。
3. 鬆開按鍵，恢復出廠設置完成。

1. 狀態提示：燈號閃爍藍燈。
2. 充電時：燈號紅燈常亮。
3. 充電完畢：燈號綠燈常亮。
4. 請將產品正確置於無線充電區域進行充電。
5. 充電完畢請將本產品移開無線充電器。
6. 低電源狀態下，約需1小時充滿。
7. 請使用符合經濟部標準檢驗局BSMI的無線充電器，不符安全標準的無線充電器可能損壞本產品。

1. 使用時，請務必先閱讀說明書，不當使用可能導致設備損壞，造成損失。
2. 請勿將此產品放置在潮濕處及用水浸泡。
3. 請勿摔打、撞擊、折卸或嘗試自行修復產品。
4. 請勿將此產品曝曬或放置在熱源與易燃處。
5. 請勿將此產品遺留在車室內的陽光直射處，會造成產品損壞。
6. 如發現產品有不良或故障的狀況，請立即停止使用本產品，聯絡廠商。

品名：LOOPLOOP TAG 超薄全球定位防丟卡
 型號：AT-20C
 支援系統：iOS 14.5及以上
 電池容量：155mAh
 充電最大電流：5v/120ma
 無線充電協議：Qi
 待機時間：150天(實際視使用情況而定)
 材質：塑膠
 重量：12.5克
 尺寸：54mm x 85.5mm x 1.7mm
 藍牙技術：5.1
 蜂鳴值：Built-in $\leq 80\text{dB}$ (in 10 cm)
 傳輸距離：30-50米(空曠環境)
 系統兼容性：藍牙5.0/iOS14.5及以上
 NCC認證： CCAH25LP1980T8

將卡片無線充電指示位置放置於無線充電盤上充電燈號，請參閱「LED燈號、電池說明」。

警語

1. 「取得審驗證照之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。」
2. 前述合法通信，指依電信管理法規定作業之無線電通信。
3. 低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。」

1. 「取得實驗證明之低功率射頻器材」：非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。
2. 前述合法通信，指依電管法規定作業之無線電通信。
3. 低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。」

保固服務條件限於在正常使用情況下的有效保修期內，由於產品本身品質問題引起的非人為損壞產生的故障，依據發票和本憑證將有下列的保固服務：

1. 維修時請攜帶有效購買產品發票；
2. 發票不得塗改，否則視為無效憑證。




除於下面情況（但不僅限於下列情況）不在服務範圍之內

1. 經營業務的內容和商品實物標示不符合或違改者；
2. 未經授權的維修、私拆、誤用、碰撞、動改；
3. 未按產品使用說明書使用、維護、保養而造成損壞；
4. 因人為因素導致產品損壞；
5. 因水災、火災或雷擊等不可抗力造成的損毀；
6. 無有效發票認證、且不能證明在有效期限內之商品。

1. 退貨、移轉本產品使用權於他人前，請務必於「尋找 APP」內執行「移除裝置」動作，詳情請查閱使用方式「刪除、重新配對設備」。
2. 有關退貨條款請查閱官方網站。



品牌商：悠晟股份有限公司
 地址：242新北市新莊區福慧路210號12樓
 品牌網站：www.looploop.com.tw
 服務電話：02-85213556
 LINE官方：@looploop

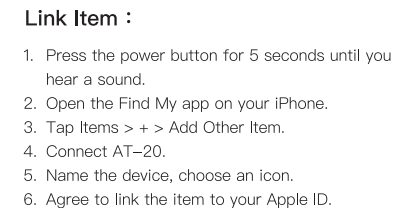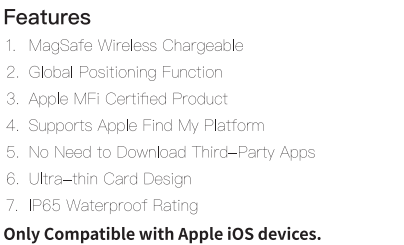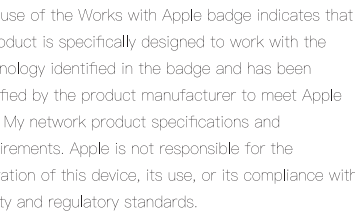

7. If low battery is shown, restart the Find My app to update.
8. For connection issues, restart or reset the device as per the manual.
9. Steps may vary by iOS version; refer to the Find My app.

1. Open the Find My app.
2. Tap Items, then select the device name.
3. Scroll down and select Lost Mode to enable it.
4. Follow the instructions, tap Continue, enter your contact phone number and email, verify the details, and tap Enable to complete the setup.

1. Make sure your finder is activated.
2. Open the "Find My" app, tap "Items" and select the device name.
3. Tap "Remove Item", the device will emit a tone and enter pairing mode. If not re-paired within 10 minutes, it will exit pairing mode. Press the power button again to re-pair.

1. Power On: Press the button for 5 seconds until a sound plays.
2. Power Off: Press the button 5 times within 2 seconds to hear a a sound plays.

3. **Status Check:** Double-click the Power button. Sound indicates standby; no sound means off or low battery (refer to the battery instructions).

1. Remove the device from the Find My app.
2. While the device is powered on, Double-click the button, then hold it for 10 seconds until a sound plays.
3. Release the button to complete the factory reset.

1. Status Indicate: Blinking Blue Light.
2. Charging: Solid Red Light.
3. Charging Complete: Solid Green Light.
4. Place the product correctly on a wireless charging pad.
5. Remove the product from the charger once fully charged.
6. Takes approximately 2.5 hours to fully charge in low power mode.
7. Use a wireless charger compliant with certified standards. Non-compliant chargers may damage the product.

1. Please read the instruction manual before use to avoid improper use and potential damage to the device.

2. Do not place the product in damp areas or submerge it in water.
3. Avoid dropping, hitting, disassembling, or attempting to repair the product yourself.
4. Do not expose the product to direct sunlight or place it near heat sources or flammable materials.
5. Do not leave the product in a car exposed to direct sunlight, as it may cause damage.
6. If the product is defective or malfunctions, stop using it immediately and contact the manufacturer.

Product: LOOPLOOP TAG Ultra Thin Item Finder
Model: AT-20C
Material: Plastic
Capacity: 155mAh
Wireless Charging Input: 5V/120ma
Weight: 12.5g
Dimensions: 54 x 85.5 x 1.7 mm
Standby Time: 150 days (depending on usage)
Bluetooth: 5.1
Beeping Volume: Built-in ≤80dB (at 10 cm)
Transmission Distance: 30~50 m (in an open environment)
Compatibility: BT 5.0 / iOS 14.5 and above
Taiwan NCC Certification CCAH25LP1980T8

Place the product on a wireless charger. For charging indicator lights, please refer to the “LED Indicator & Battery Information” section.

Restriction of Hazardous Substances Compliance

Device Name: LOOPLOOP TAG Ultra Thin Item Finder		Model (Type) : AT-20				
Unit	Restricted Substances					
	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Internal metal parts	●	●	●	●	●	●
Plastic	●	●	●	●	●	●
Circuit board	●	●	●	●	●	●
Battery	●	●	●	●	●	●

Note 1: "Exceeds 0.1 wt%" and "Exceeds 0.01 wt%" indicate the restricted substances exceed the baseline percentage content.

Note 2: "●" indicates that the percentage content of the restricted substance does not exceed the baseline percentage value.

Note 3: "-" indicates that the restricted substance is not applicable.

1. Warranty service conditions are limited to the effective warranty period under normal use. For non-human-caused malfunctions due to product quality issues, based on the invoice, the following warranty services will be provided according to national regulations.
2. One-year warranty from the date of purchase.
3. A valid product purchase invoice for repairs. Must not be altered; otherwise, it will be considered invalid.

The following conditions (including but not limited to) are not covered by the service:

1. Unauthorized repairs, disassembly, misuse, collision, or modifications.
2. Damage caused by not using, maintaining, or servicing the product according to the user manual.
3. Damage caused by human factors.
4. Damage caused by natural disasters such as floods, fires, or lightning strikes.
5. No valid invoice certification and inability to prove the product is within the valid warranty period.

Return to vendor / Transfer to others

Before returning or transferring the item finder, please perform the "Remove Item" action in the "Find My App." For more details, please refer to Remove/Re-Pair section. For return terms, please refer to the official website.

Authen CO., LTD. Taiwan
Website: www.looploop.com.tw
Phone: +886-2-85213556
Email: info@looploop.com.tw
Address: 12F., No. 210, Fuhui Rd., Xinzhuang
Dist., New Taipei City 242032

